

PILE DRIVE

300/F

- UP TO 6M OR 19'8" POST HEIGHT
- QUALITY MACHINE
- PERFORMANCE
- SAFETY
- PRODUCTIVITY
- COMPACT
- POWERFUL
- VERSATILE
- RELIABLE
- EASY MAINTENANCE
- OPERATOR TRAINING
- TECH SUPPORT
- MECHANICAL TRAINING
- SPARE PARTS WAREHOUSES:
 - ◆ EUROPE
 - ◆ USA
 - ◆ AUSTRALIA



info@aleanda.com

SPECIFICATIONS

Hammer



Brand	Indeco	
Joule Options	950 / 1200	
Blows	n/min	620-1500 / 570-1180
Hammer Weight	Kg	350 / 450
	Lb	771/ 992
Noise Rating	Db	xx/114

Machine Travel Speed

Low Speed	km/h	1.92
	miles/h	1.2
High Speed	km/h	3.33
	miles/h	2.1

Maximum Post Size

Height Options	Meter	4.4 / 5 / 6
	Foot	13'1" / 16'4" /19'7"
Side	mm	220/220
	Inches	9"/9"

Machine Dimensions

Height	mm/inches	2,670 / 105
Width	mm/inches	2,350 / 93
Length	mm/inches	2,100 / 83
Weight	kg/lb	4,500 / 9,920

Engine Option 1

Engine	Doosan
Cylinders	3
Displacement	1800 cm ³
Power at 2500 RPM	41 Kw
Liquid cooled	

Engine Option 2

Make	Yanmar
Model	4TNV88
KW	35.4
HP	48.1
EPA Certification	Tier 3/Tier 5

Hydraulic System




Oil Tank Size	litres	140
	US gallons	37
Oil Pressure	Bar	180
Fuel Tank Size	litres	60
	US gallons	16

Inclination Capabilities

Column Inclination	degrees	+10 to -51
Lateral Inclination	degrees	+10 to -10

TRANSPORT DIMENSIONS



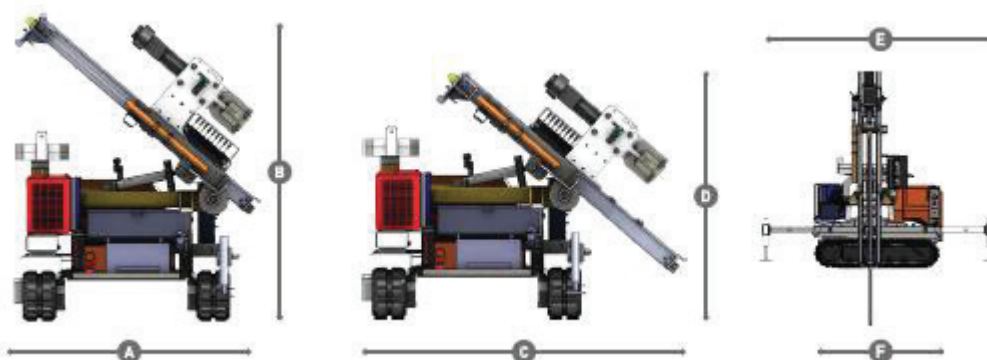


KEY

A	2,350mm	93"	C	3,030mm	120"	E	3,780mm	149"
B	2,900mm	114"	D	2,310mm	91"	F	2,088mm	82"

info@aleanda.com

THE BEST QUALITY AND PERFORMANCE

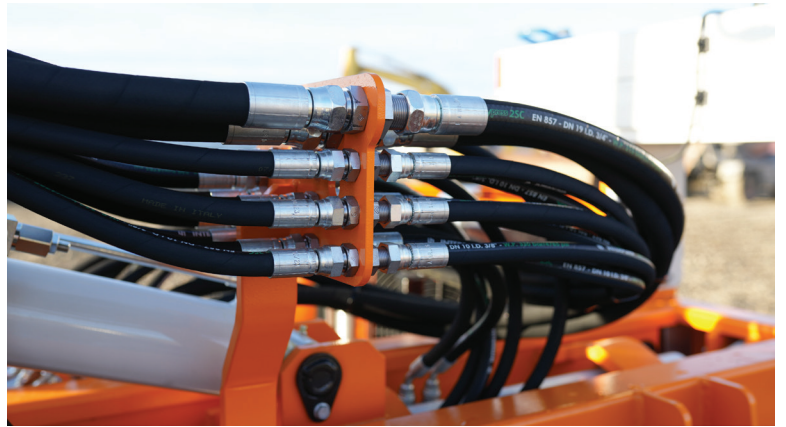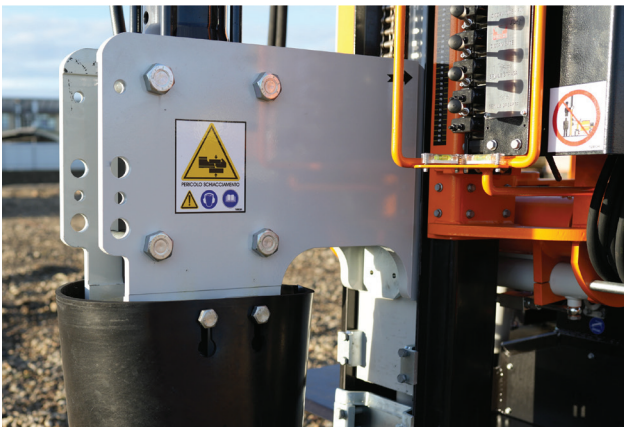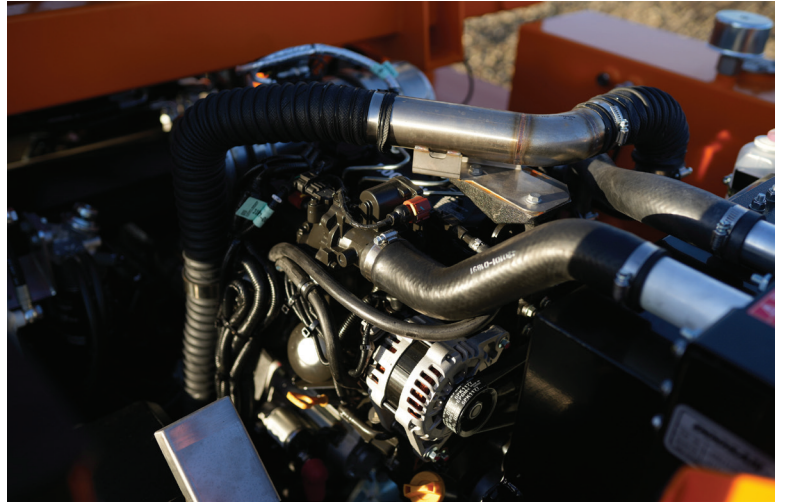

info@aleanda.com

ALEANDA